

8300 SERIES PORTABLE TERMINAL

Specifications

Power

Operation battery:	Li-on 800 mA; 3.7V, 700mAh
Backup battery:	3.0V, 7.0mAh, rechargeable Lithium
Working hour:	Over 100 hours

Dimensions

Size:	170mm (L) x 77mm (W) x 37mm (H)
Weight:	250g (including batteries)

General Characteristics

CPU:	16-bit CMOS, low power consumption
Program memory:	1MB flash memory
Data memory:	2MB/4MB SRAM.
Display:	128x64 graphic dots FSTN with LED back-lit
Keypad:	24 Numeric or 39 Alphanumeric rubber keys
Scanning angle :	0° to 45° Factory Set

Indicator

Buzzer:	Programmable, 1KHz to 4KHz
LED:	Dual color, green and red

Programming Language

"C", "BASIC", and a Windows-based Application Generator

Laser Scanner (8300L)

Light source:	Visible Laser diode operating at 670 ° ± 15nm
Scan rate:	36 ° ± 3 scans/sec
Scan angle:	42° ± nominal
Depth of field:	5cm ~ 95cm, depends on barcode resolution

Long Range CCD (8300C)

Resolution:	Up to 0.125mm (5mil)
Depth of field:	2cm ~ 28cm
Scan rate:	100 scans/sec

Environmental

Operating Temperature:	-20° C to 60° C, IP Rating: 65
Storage Temperature:	-30° C to 70° C
Humidity:	Non-condensed 5% to 95%
Shock resistance:	1.2m drops onto concrete
EMC regulation:	FCC class-A, CE and C-Tick approved



Communication

RS-232:	Transmission speed up to 115.2k bps
IrDA:	Standard 1.0 compatible, up to 115.2k bps
High Speed IR:	Up to 115.2k bps transmission rate

Accessories

RS-232 cable, Keyboard Wedge Cable, IR Transceiver, Cradle with or without standard Modem (56K)

Reading Performance

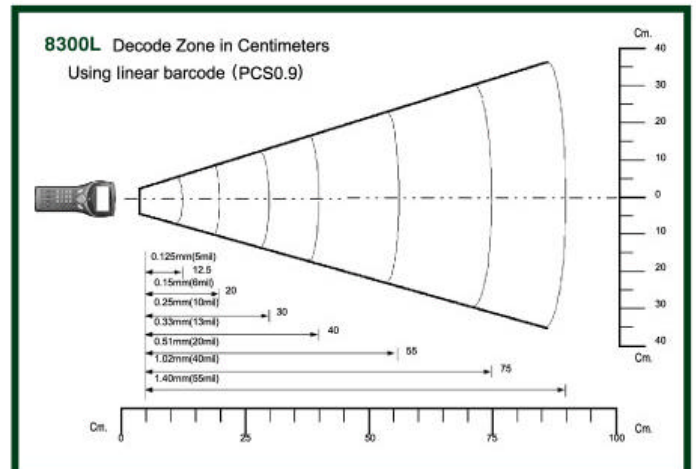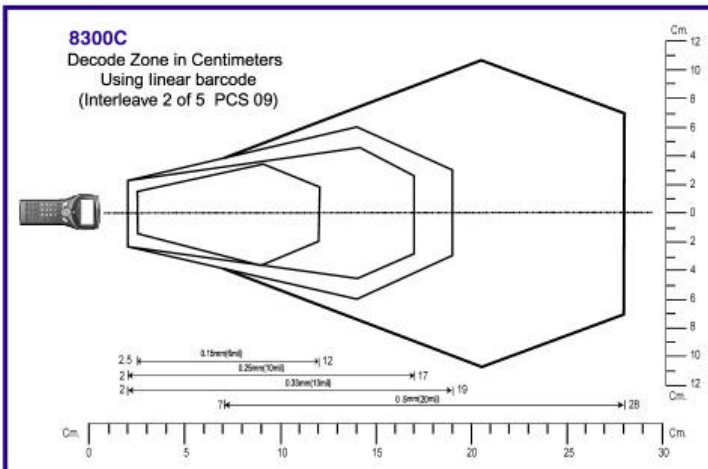

Dimensions



Headquarter
Syntech Information Co., Ltd.
 5F, No. 196-3, Ta-Tung Road
 Sec. 3, Hsi-Chih
 Taipei Hsien, Taiwan
 TEL: +886 2 8647 3300
 FAX: +886 2 8647 1155
 www.cipherlab.com.tw

USA
Syntech West Inc.
 3404 57th Street NW Suite B
 Gig Harbor, WA 98335
 U.S.A.
 TEL: +1 253 858 7906
 FAX: +1 253 858 7713
 www.cipherlab.com

8300 Series Portable Terminal

Dynamic
Robust
Dynamic
Robust
Dynamic
Robust



Cradle



Rechargeable Lithium-ion Battery Pack



Battery Charger

- Programmable in: BASIC, C & Application Generator
- 1MB program memory + 2MB / 4MB data memory
- Two keypad layouts, 24 or 39 keys
- Ideal for Industrial, Harsh Environment
- IP 65