

IMAGETEAM[™] 3800LX

Hand Held Linear Imager



The IMAGETEAM[™] 3800LX is a longer range, high performance, hand held bar code scanner. The IT3800LX uses linear imaging technology to match the reading distance of standard range lasers with a bright, sharp aiming line and high resolution imaging to deliver exceptional reading performance.

The IT3800LX handle is smoothly contoured to fit all sized hands, plus has a soft grip area to add comfort and prevent slipping. Its aesthetically pleasing look surrounds a rugged, durable construction, built for demanding work environments. The IT3800LX is so durable, it carries a 5 year warranty.

Various models are available for different interfaces:

The 3800LX-11 is available for IBM 486X, 469X, OCIA, PC XT/AT/PS-2 Keyboard Wedge, Direct Connect Keyboard Replacement, TTL Level RS-232, TTL Serial Wedge, Wand Emulation, HHLC, and Non Decoded.

The 3800LX-12 can be used with PC XT/AT/PS-2 Keyboard Wedge, Direct Connect Keyboard Replacement, Apple ADB, TTL Level RS-232, TTL Serial Wedge, Wand Wmulation, HHLC, and Non Decoded.

The 3800LX-15 is available for IBM SurePOS USB, USB, IBM 486X, 469X, PC XT/AT/PS-2 Keyboard Wedge, Direct Connect Keyboard Replacement, TTL Level RS-232, TTL Serial Wedge, and Wand Emulation.

The IT3800LX is excellent in hand held scanning applications, such as retail point of sale and in-store inventory. It operates from a tabletop holder in manual trigger mode, or may be placed in an adjustable stand for automated operation. The IT3800LX can be used indoors or outside in bright sunlight. Typical applications are retail point-of-sale, in-store inventory, document management, transaction processing of bar coded receipts, payment counter, and outdoor sales kiosks.

Features & Benefits

Even More Reading Distance

Provides greater range on UPC than standard lasers for faster, easier point-of-sale scanning.

Bright, Sharp and Focused Aiming Line

Easy to aim and scan codes in any lighting condition from darkness to full sunlight, tightly stacked bar code sheets, or small, high resolution labels.

Solid, Rugged Design

No moving parts inside and solid construction outside deliver years of reliable service in demanding work environments.

Powerful, Flexible Architecture

Connects and interfaces to all major PCs, commercial and retail POS terminals easily and quickly with Windows[®] based programming tools or bar code programming menus.

Real World Reading Performance


Accommodates printer induced bar space variation, faded labels, short quiet zones, low contrast codes, dot matrix printing, and multipart forms with higher resolution, better optics, and improved decoding algorithms.

5 Year Warranty

Typical reading zones on good quality bar codes

Performance

Illumination:	630 NM Visible Red LED
Receiving Device:	3648 element linear imager
Reading Distance:	From 2 in. (5.1 cm) to 16 in. (40.6 cm) on 100% UPC codes From 3 in. (7.6 cm) to 36 in. (91.4 cm) on 40 mil codes
Reading Width:	6 in. (15.2 cm) code width at 9 in. (22.9 cm) distance on 100% UPC 16 in. (40.6 cm) code width at 25 in. (63.5 cm) on 40 mil
Resolution:	6.5 mil. at 5.5 in. (14 cm) distance
Skew Angle:	±30°
Pitch Angle:	±15°
Horizontal Velocity:	2 in. (5.1 cm) per second
Minimum Reflectance Difference:	30%
Scan Rate:	Programmable to 270 scans per second
Decode Rate:	270 decodes per second

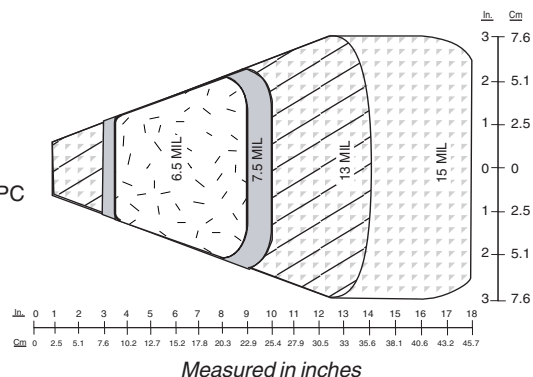

Mechanical/Electrical

Dimensions

Length:	5.3 in. (13.5 cm)
Height:	6 in. (15.2 cm)
Width:	3.1 in. (7.9 cm)
Weight:	6.3 oz. (179.2 g)
Housing:	Polycarbonate/ABS blend, UL 94V0
Power Requirements:	5Vdc ± 10% at scanner
Current Draw:	
@270 s/s	Scanning Standby
@67 s/s	275mA 125mA
	150mA 125mA
Power Supply	
Noise Rejection:	Maximum 100mV peak to peak, 10 to 100 kHz

<u>IT3800LX-15</u>	Scanning	Standby
	450mA	235mA

Environmental

Temperature

Operating:	+32°F to +122°F (0°C to +50°C)
Storage:	-4°F to 140°F (-40°C to +60°C)
Humidity:	0 to 95%
Mechanical Shock:	Operational after 25 drops from 5 ft. (1.53 m) to concrete
Ambient Illumination:	0 - 70,000 lux
ESD Protection:	Functional after 15kV discharge
Vibration:	Withstands 5G peak from 20 to 300 Hz
Agency:	FCC Class B, CE EMC Class B, CE Low Voltage Directive, IEC60825-1 LED Safety: Class 1, UL, cUL listed, TÜV
MTBF:	per MIL-HDBK-217F Ground Benign exceeds 100,000 hours
Symbologies:	Codabar, Code 3 of 9 including PARAF, Interleaved 2 of 5, Code 2 of 5, RSS Code, Matrix 2 of 5, Code 11, Code 128, UPC, EAN/JAN, China Postal Code.
Interfaces:	Most popular PCs and terminals via keyboard wedge, keyboard replacement/direct connect, Apple ADB, USB, IBM SurePOS USB, TTL level RS-232, wand emulation mode, TTL level Serial Wedge, and includes (HHLC) non decoded laser compatible output. IBM 4683/93 and OCIA retail terminals in 3800LR-11 model.
Warranty:	Five year factory warranty

Worldwide Offices

Offices Serving North America

Skaneateles Falls, NY
Tel: (315) 685-8945
Fax: (315) 685-3172
Charlotte, NC
Tel: (704) 537-1444
Fax: (704) 532-4191

Offices Serving Europe, Middle East, and Africa

Europe
Tel: Int +31 (0) 40 24 24 486
Fax: Int +31 (0) 40 24 25 672
United Kingdom
Tel: Int +44 (0) 1 925 240055
Fax: Int +44 (0) 1 925 631280
France
Tel: Int +33 (0) 1 461 04111
Fax: Int +33 (0) 1 461 04120

Germany

Tel: Int +49 (0) 7 477 151377
Fax: Int +49 (0) 7 477 151378

Offices Serving Asia and the Pacific Rim

Hong Kong
Tel: Int +852 2511 3050/2511 3132
Fax: Int +852 2511 3557

Japan

Tel: Int +813 52127392
Fax: Int +813 32617372

Offices Serving Latin America

Naples, Florida
Tel: (941) 263-7600
Fax: (941) 263-9689